


## FaceEngine 5

### Smart Face Recognition Terminal



High Performance and  
Rapid Recognition  
Speed

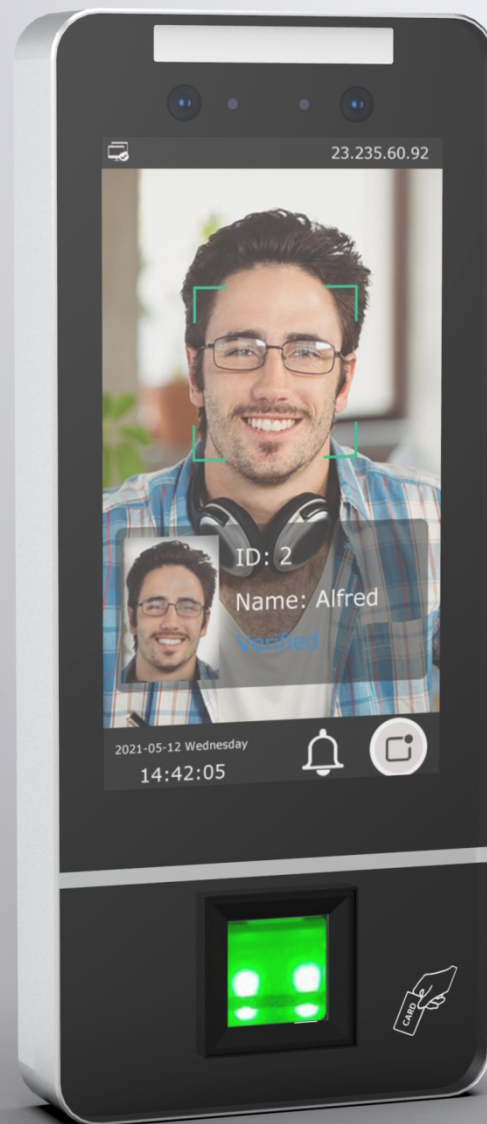

Dynamic Living  
Face Recognition






Biometric  
Identification



Well-developed  
Attendance  
Management System

## ● Product Specifications

Product		
	FaceEngine 5	FaceEngine T5
Identification mode	Face / mask, fingerprint, card, passcode	Face / mask, fingerprint, card, passcode, temperature measurement
Face recognition distance	0.5-2M	
Face recognition speed	< 0.3s	
RFID technology	13.56 MHz Mifare card (standard), 125KHz ID card (optional)	
Temperature detection distance	—	0.5-1M
Temperature range	—	30°C-50°C
Temperature accuracy	—	± ≤ 0.2°C
Temper alarm	—	Support
Max. users	Face: 10,000 , fingerprint: 10,000 cards: 10,000 , password: 10,000	
Max. text log face	200,000	
Max. image log	50,000	
Group, time zone	42 timezone, anti-passback	
Multiple language	Support	
Operation system	LINUX	
CPU	Dual core 1.2GHz	
Storage capacity	16G	
Camera	Dual camera( VIS & NIR )	
Display	5" TFT capacitive touch screen resolution 720*1280	
Dimensions (W x H x D)	86mm x 201mm x22mm	
Weight	450g	500g
Working temperature	-20°C~60°C (4°F~160°F)	
Anti-static electricity	Touch: ≥6KV, space: ≥8KV	
Humidity	0% to 90%	
Power input	DC12V/2A (DC9V-14V)	
TCP/IP	Support	
RS485	Support	
USB	Support	
Wi-Fi	—	Support
4G	—	Support
Relay	1 relay out	
Wiegand	One group of wiegand input / wiegand output (26/34)	

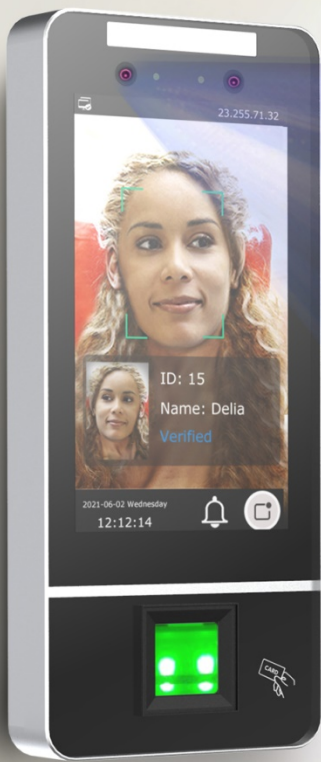

- Built-in Infrared face recognition camera and visual face recognition cameras.
- 99.9% authentication accuracy.
- Dynamic face recognition and binocular living body face recognition.
- Semiconductor fingerprint sensor.

## A Wide Range of Authentication Multifunction

FaceEngine 5 offers a wide range of authentication multifunction: face, fingerprint, passcode and cards, mask identification, temperature detection.



Face/Mask



Fingerprint



Card (IC or ID)



Passcode



Body Temperature

\* 10,000 face +10,000 fingerprints +10,000 cards +10,000 passcode + 200,000 records + 50,000 capture images


\* Built-in card reading module, support Mifare card 13.56 MHz (standard), ID card 125KHZ (optional)

\* Dynamic face recognition, support remote user registered through profile photo uploads.

\* Semiconductor fingerprint sensor, improve the performance of the fingerprint identification.

## High Performance Dynamic Face Recognition

- 1.2 GHz dual core CPU, recognition distance up to 2M with matching speed < 0.3s.
- Contactless dynamic face recognition and face recognition of users wearing masks.
- Alarm and limits access of users with high temperature and users not wearing masks.
- Built-in IR and visual cameras, wide dynamic strong light suppression with 99.9% authentication accuracy.
- Anti-spoofing performance, by deep learning-based AI algorithm applied for binocular living body detection, effective prevention of photos and video spoofing and to produce the best live face recognition performance.

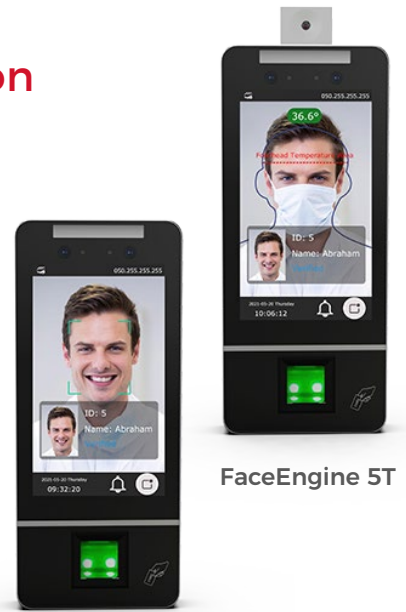

FaceEngine 5

FaceEngine 5T

## Well-developed Attendance Management System

- With all access control professional functions, detailed excel report can be directly exported through U disk.
- Support touch-screen offline operation, PC-less, easy to use.
- Support remote user registered through profile photo uploads.
- Support multiple communication modes: U disk, TCP/IP, WIFI.

### System Configurations

